


NEW! Now with zero leakage – in combination with “SHR”* premium soft seal* (up to +200°C)

SAFE

Variable & safe – in more than 35,000 variations!

NEW
with SHR*!

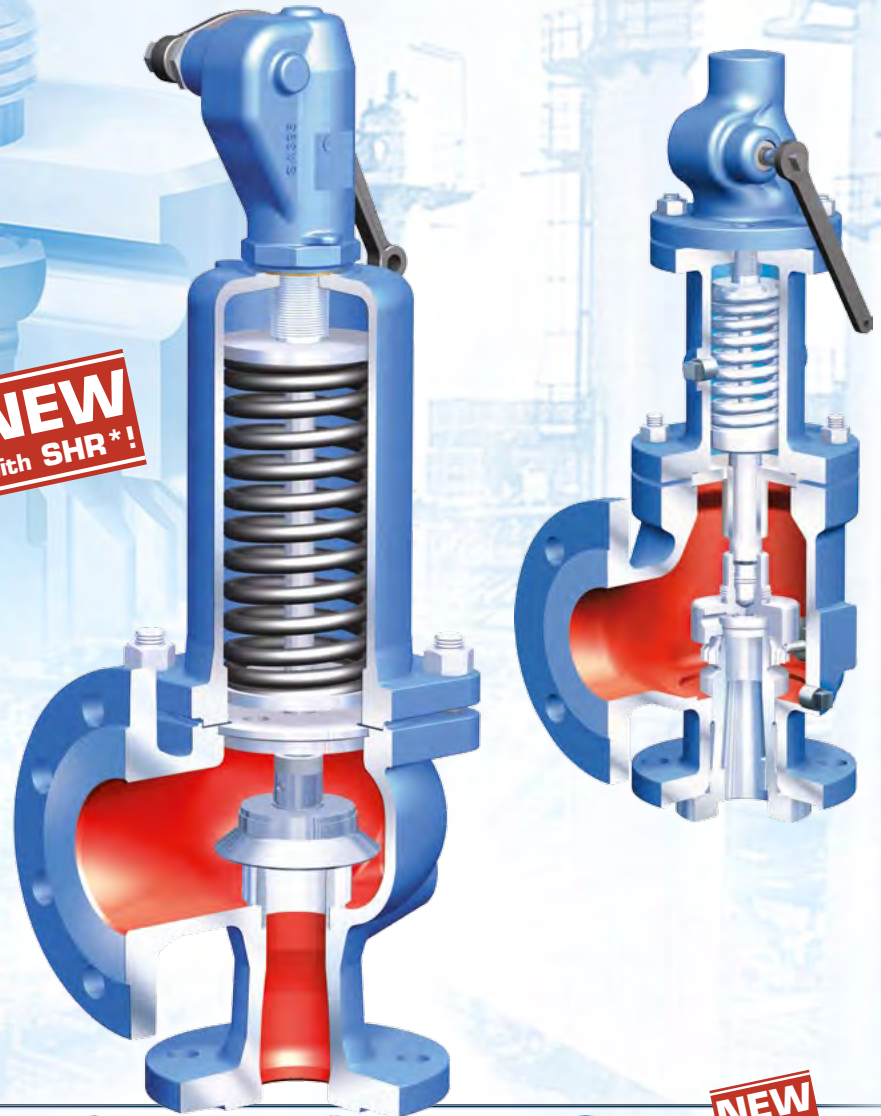

* Steam-/Hot Water-Resistance

NEW
with SHR*!



SAFE
Full-lift safety valve



SAFE-P
for small capacities



SAFE TC
thread connections



SAFE-TCP / TCS
for high pressures



ARI-REYCO™
according to API 526



SAFE-SHR*
premium soft seal
up to +200°C

Now with zero leakage – in combination with the innovative premium soft seal

“SHR”*

For steam and hot water up to +200°C!



ARI-SAFE-900

ARI-SAFE-SN
(Semi Nozzle)

Steam-/Hot Water-Resistance:

- Suitable for SAFE 900 and SAFE SN (Semi Nozzle)
- Even better economy through extended lifetime (optimal leakproofness)
- Type test approved acc. to VdTÜV
- Ideal for steam and hot water generators acc. to DIN EN 12953 (TRD 421), e.g. shell boilers

* Steam-/Hot Water-Resistance



www.ari-armaturen.com